



Shapes and Sizes

Standard (One face only):


11/23/2004

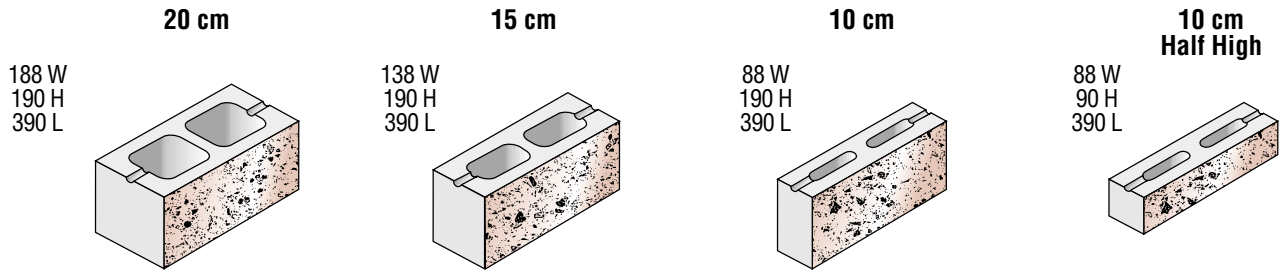


Half (One face only):

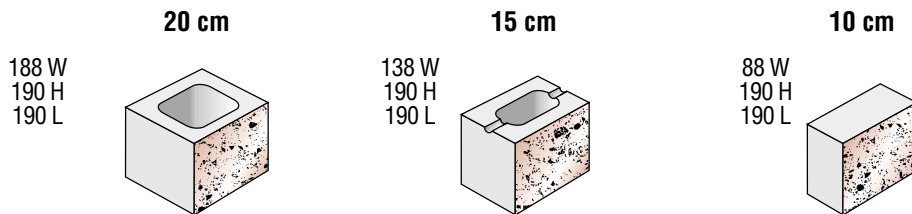


Return Corner (One face and one end only):

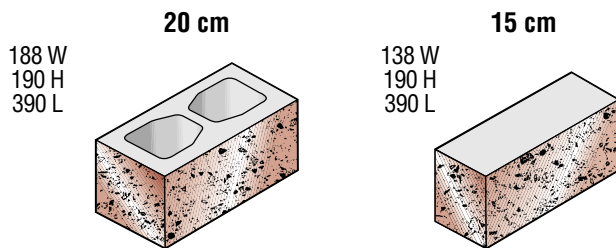

Half Return Corner (One face and one end only):

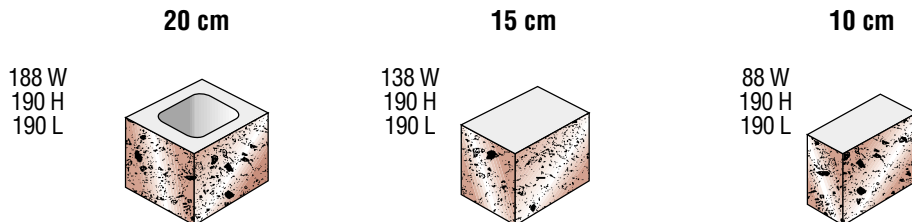

L-Corner (One face and L-Corner end only):

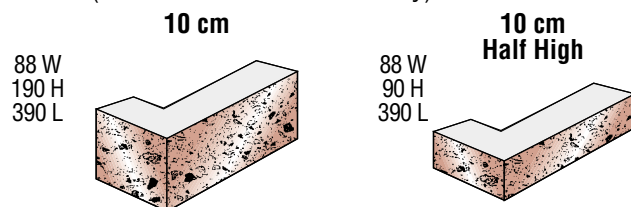

Please Note: 1) Available in metric sizes only. 2) Width of units may vary by ± 2.0 mm. 3) Single vertical center score (saw cut) available.

For actual samples - Please contact the Concrete Masonry Sales department:

CCI cci industries ltd.

Head Office:
Ph: (780) 447-2122
Fax: (780) 447-1426

COAST

Vancouver BC
Ph: (604) 270-8411
Fax: (604) 270-8473

EDCON

Edmonton AB
Ph: (780) 447-2122
Fax: (780) 447-1426

CMS

Calgary AB
Ph: (403) 279-8810
Fax: (403) 279-5177

TALLCRETE

Winnipeg MB
Ph: (204) 453-8335
Fax: (204) 453-5205

The
Beauty of
DURABILITY™

MANUFACTURE

Terrazzo Block by CCI Industries Ltd., with its burnished face meets or exceeds the current CSA A165.1 Standard for Concrete Masonry Units and does not contain visible coal or ironstone particles. Terrazzo Block is manufactured with an approved integral water repellent admixture used in accordance with the manufacturer's specifications. The ground faces of the masonry units are sound and free of cracks or other defects that would impair the strength or permanence of the construction or interfere with the placing of the unit, in accordance with the CSA A371 Standard.

SAMPLE PANELS

Pre-construction jobsite panels, a minimum size of 1200mm x 1200mm or 4' x 4', should be constructed to establish specified product, mortar colour and installation acceptance.

HANDLING and CHIPPAGE

While burnished faced units are to be handled with extreme care at all times it should be recognized that minor chipping, of not more than 3 mm in size, can be incidental to the usual methods of manufacturing, delivery and handling and shall not be considered defects. In addition, when viewed under diffused lighting from a distance of 6.0 metres, not more than 5% of a shipment has small chips larger than 3 millimetres in size.

CONSTRUCTION

Cavity wall construction is recommended for exterior above grade walls, with proper flashing, venting and weep holes. The exterior mortar mix should contain an approved water repellent additive, following the manufacturer's instructions, and be tucked and tooled in a concave shape. When sawing block, it is recommended to use a dry cut diamond blade. Do not use wet saw cuts.

CLEANING

Cleaning during construction of the walls requires the use of clean medium hard bristle brushes, cotton rags or burlap squares to remove the green mortar residue. Do not use abrasives or acids. For a final cleaning use a detergent masonry cleaner strictly following the manufacturer's instructions, including a thorough rinsing.

GLOSS COATINGS

To accent and protect the natural beauty of the burnished face exposed aggregate, a jobsite applied acrylic semi-gloss or gloss coating is recommended after the final wall cleaning has been approved. The coating is specified in Section 09900 and is supplied and applied by painters.

JOBSITE PROTECTION

Finished walls should be protected from construction stains and trade damage by the use of plastic covering and where exterior corners are exposed plywood covering should be used.

LOCAL TECHNICAL ASSISTANCE

For additional assistance please contact the technical sales representative at your local CCI Industries Ltd. office, as noted below.