

Standard Concrete Masonry Units

Metric Light Weight Units

Imperial Light Weight Units

12/8/2005

Standard & Corner
(mixed on pallet)

Half High

Half

L-Corner


KO Lintel

Single Core Lintel


Single Bullnose

Double Bullnose

	Metric Light Weight Units				Imperial Light Weight Units							
	100 mm 100 mm Standard & Standard w Breaker 90D 190 H 390 W	100 mm 100 mm Single Score 90D 190 H 390 W	150 mm 150 mm Standard & Standard w Breaker 140 D 190 H 390 W	200 mm 200 mm Standard & Corner No Sash w Breaker 190 D 190 H 390 W	200 mm 200 mm Single Score & Single Score Corner No Sash 190 D 190 H 390 W	250 mm 250 mm Standard & Corner No Sash w Breaker 240 D 190 H 390 W	250 mm 250 mm SKB Block & SKB Corner No Sash w Breaker 240 D 190 H 390 W	300 mm 300 mm Standard & Corner No Sash 290 D 190 H 390 W			8 Inch 8 Inch Standard & Corner No Sash 7 5/8 D 7 5/8 H 15 5/8 W	10 Inch 10 Inch Standard & Corner No Sash 9 5/8 D 7 5/8 H 15 5/8 W
	100 mm Half High 90 D 90 H 390 W	150 mm Half High 140 D 90 H 390 W	200 mm Half High 190 D 90 H 390 W									
		150 mm Half No Sash 140 D 190 H 190 W	200 mm Multi-Purpose Half 190 D 190 H 190 W		250 mm Half No Sash 240 D 190 H 190 W		300 mm Half No Sash 290 D 190 H 190 W			8 Inch Half w Sash 7 5/8 D 7 5/8 H 7 5/8 W	10 Inch Half No Sash 9 5/8 D 7 5/8 H 7 5/8 W	
	100 mm L-Corner 90/190 D 190 H 390 W											
		150 mm Knock Out Lintel 140 D 190 H 390 W	200 mm Knock Out Lintel 190 D 190 H 390 W		250 mm Knock Out Lintel 240 D 190 H 390 W	250 mm SKB Knock Out Lintel 240 D 190 H 390 W	300 mm Knock Out Lintel 290 D 190 H 390 W	300 mm SKB Block Knock Out Lintel 290 D 190 H 390 W		8 Inch Knock Out Lintel 7 5/8 D 7 5/8 H 15 5/8 W	10 Inch Knock Out Lintel 9 5/8 D 7 5/8 H 15 5/8 W	
			200 mm Single Core Lintel 190 D 190 H 390 W		250 mm Single Core Lintel 240 D 190 H 390 W					8 Inch Single Core Lintel 7 5/8 D 7 5/8 H 15 5/8 W		
		150 mm Single Bullnose w Breaker 140 D 190 H 390 W	200 mm Single Bullnose w Breaker 190 D 190 H 390 W	200 mm Single Bullnose Half 190 D 190 H 390 W	250 mm Single Bullnose w Breaker 240 D 190 H 390 W	50 mm Slab 40 D 190 H 390 W						
		150 mm Double Bullnose w Breaker 140 D 190 H 390 W	200 mm Double Bullnose w Breaker 190 D 190 H 390 W	200 mm Single Bullnose Half 190 D 190 H 390 W	250 mm Double Bullnose w Breaker 240 D 190 H 390 W	400 mm Square Plaster 390 D 190 H 390 W						

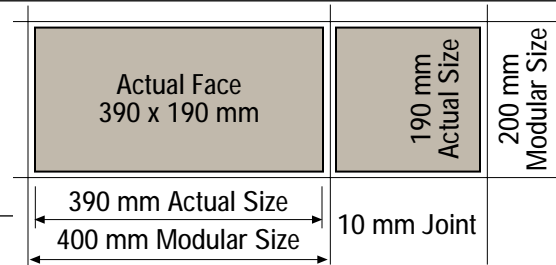

The strength of the masonry unit is measured over the net area of the unit. Stock units are manufactured using L₂30s concrete.



The "Beauty of DURABILITY"